




SPB Stainless Steel Submersible Sewage Pump



Application

- Wastewater drainage in factories, construction sites and commercial facilities
- Drainage system in municipal sewage treatment plants
- Drainage station in residential quarters
- Municipal projects
- Methane pools and field irrigation in countryside

Performance Curves

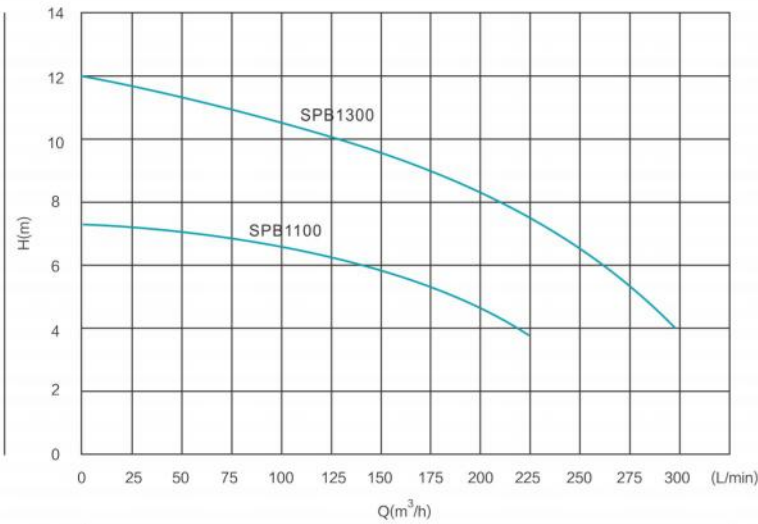

Motor

- Copper winding
- Insulation class: F
- Protection level: IP68

Pump

- Max. immersion depth: 5m
- Max. liquid temperature: +40°C
- Liquid pH value: 5-9
- Max. liquid density: $1.2 \times 10^3 \text{ kg/m}^3$

Performance Table

Model	Power		Pipe inch	Max flow L/min	Max head m	Dim mm	G.W kg
	Kw	Hp					
SPB1100	1.1	1.5	2"	233	7	270×220×550	24
SPB1300	1.3	1.7	2"	300	12	300×240×560	25